


BS TRIPLEX CHAIN DIMENSIONS

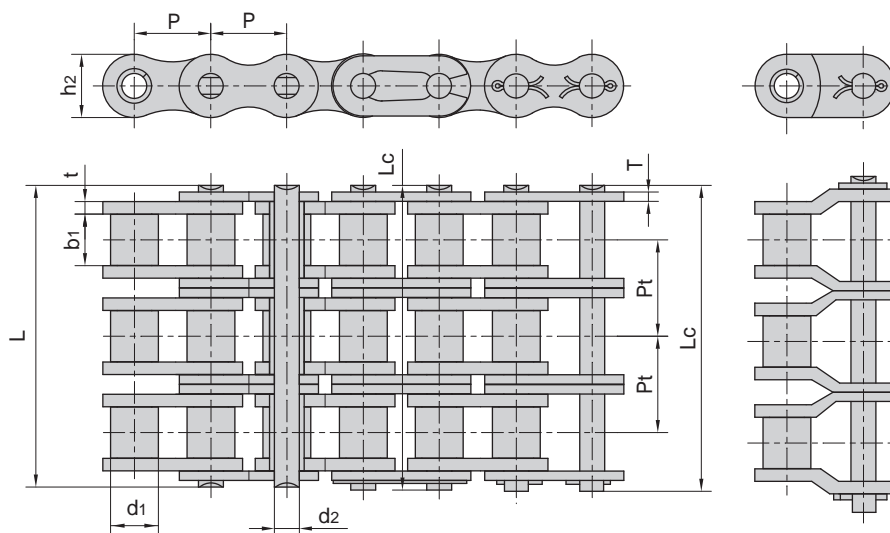

DIN/ISO Chain No.	Pitch	Roller Di- ameter	Width between inner plates	Pin Di- ameter	Pin Length		Inner Plate Depth	Plate Thickness	Average Tensile Strength
	P mm	d1 max mm	b1 min mm	d2 max mm	L max mm	Lc max mm	h2 max mm	t/T max mm	Qo kN
05B-3	8	5	3	2.31	19.5	20.2	7.1	0.8	13.8
06B-3	9.525	6.35	5.72	3.28	33.5	34.6	8.2	1.3	30.1
08B-3	12.7	8.51	7.75	4.45	45.1	46.1	11.8	1.6	57.8
10B-3	15.875	10.16	9.65	5.08	52.7	54.1	14.7	1.7	84.5
12B-3	19.05	12.07	11.68	5.72	61.5	63.1	16	1.85	101.8
16B-3	25.4	15.88	17.02	8.28	99.8	101.2	21	4.15/3.1	203.7
20B-3	31.75	19.05	19.56	10.19	114.2	117.9	26.4	4.5/3.5	290
24B-3	38.1	25.4	25.4	14.63	150.1	154.6	33.2	6.0/4.8	493
28B-3	44.45	27.94	30.99	15.9	184.2	188.7	36.7	7.5/6.0	609.5
32B-3	50.8	29.21	30.99	17.81	183.2	188.2	42	7.0/6.0	770.5
40B-3	63.5	39.37	38.1	22.89	226.8	233.8	52.96	8.5/8.0	1092.5