


BS DUPLEX CHAIN DIMENSIONS

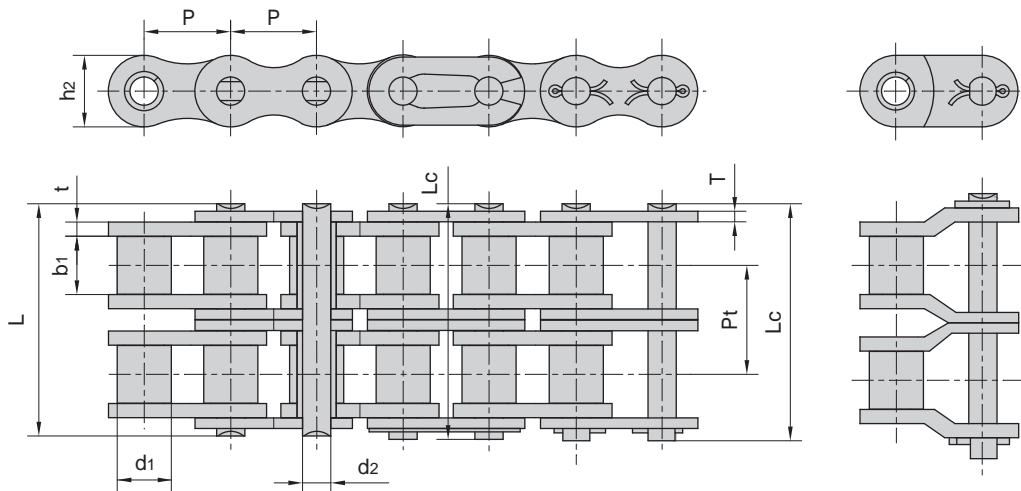

DIN/ISO Chain No.	Pitch	Roller Di- ameter	Width between inner plates	Pin Di- ameter	Pin Length		Inner Plate Depth	Plate Thickness	Average Tensile Strength
	P mm	d1 max mm	b1 min mm	d2 max mm	L max mm	Lc max mm	h2 max mm	t/T max mm	Qo kN
05B-2	8	5	3	2.31	13.9	14.5	7.1	0.8	10.2
06B-2	9.525	6.35	5.72	3.28	23.4	24.4	8.2	1.3	18.7
08B-2	12.7	8.51	7.75	4.45	31.2	32.2	11.8	1.6	38.7
10B-2	15.875	10.16	9.65	5.08	36.1	37.5	14.7	1.7	56.2
12B-2	19.05	12.07	11.68	5.72	42	43.6	16	1.85	66.1
16B-2	25.4	15.88	17.02	8.28	68	69.3	21	4.15/3.1	133
20B-2	31.75	19.05	19.56	10.19	77.8	81.5	26.4	4.5/3.5	211.2
24B-2	38.1	25.4	25.4	14.63	101.7	106.2	32.2	6.0/4.8	319.2
28B-2	44.45	27.94	30.99	15.9	124.6	129.1	36.7	7.5/6.0	406.8
32B-2	50.8	29.21	30.99	17.81	124.6	129.6	42	7.0/6.0	508.5
40B-2	63.5	39.37	38.1	22.89	154.5	161.5	52.96	8.5/8.0	711.9