



CONVEYOR & TRANSMISSION LTD


SPECIALISTS IN CONVEYOR AND TRANSMISSION PRODUCTS

BELT TECHNICAL DATA SHEET

TUFFY — 2/V10/U0/8 LL

BELT CONSTRUCTION: Two ply polyester, PVC grey longitudinal profile top cover, low friction urethane impregnated underside

Colour	Grey
Belt Thickness	2.8mm
Top Cover Thickness	1.0mm
Bottom Cover Thickness	Nil
Belt Weight	2.5kg/m ²
Coefficient of friction (On steel)	0.15
Minimum pulley Diameter	50mm (at ambient temperature)
Minimum back flex Diameter	80mm (at ambient temperature)
Belt Factor	8 N/mm at 1% stretch
Temperature Range	-10 to + 70 Deg C
Food Rating	N/A
Carcass construction	Rigid
Stock width	2000mm
Manufactured width	2000mm

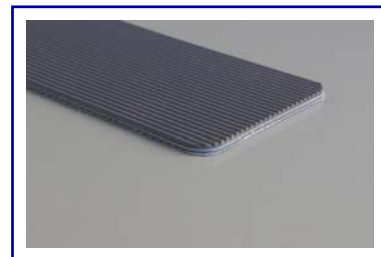

Recommended Splice	Lap or finger splice
Recommended fastener	UX1 or # 62

Belt Characteristics	Dimensionally stable and laterally rigid Suitable for longitudinal or lateral profiles High adhesion for incline of unit goods Non marking high friction PVC top cover Excellent tracking properties, wide belts run perfectly flat Unaffected by oil, grease, moisture and humidity
----------------------	---

Typical Applications	Warehouse, distribution centres Postal and airport baggage handling / X-Ray machines Laundry and textile transporting Light duty time transporting Packaging conveyors / box handling, Cardboard / paper manufacturing
----------------------	--

68A GREENMOUNT DRIVE, EAST TAMAKI, AUCKLAND, NEW ZEALAND.
PHONE 0064 (09) 274 3500 FAX 0064 (09) 274 3501
EMAIL: sales@contrans.co.nz

www.contrans.co.nz